

SMD 2835 1 W Data Sheet



India's first LED Chip – Complying International Quality and Lighting Standards.

Description:

Indo Japan's SMD LED 2835 series products use high quality silica gel packages, which improves the heat dissipation, thus enhancing the performance and reliability of LED Chips.

SMD LED 2835 series has low power consumption, high CRI, wide beam angle, long product life, which makes this series suitable for all forms of lighting applications.

Features:

- LM80 Compliant
- RoHS & CE Compliant
- Pb free
- Size : 2.8mm x 3.5mm x 0.65mm
- Viewing Angle : 120°
- White LED 2835
- High Lumen Output
- Low Power Consumption

Applications:

- General Lighting
- Automotive Lighting
- Decorative Lighting
- Indicator Lighting
- Switch Lighting

SMD 2835 1 W Data Sheet



Absolute Maximum Ratings ($T_{\text{Soldering}} / T_a = 25^{\circ}\text{C}$)

Parameters	Symbol	Rating	Unit
Forward Current	I_f	120	mA
Peak Forward Current (Duty 1/10 @10ms)	I_{fp}	180	mA
Max Power Dissipation	P_d	1128	mW
Operating Temperature	T_{opr}	-40 ~ +85	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-40 ~ +100	$^{\circ}\text{C}$
Thermal Resistance (Junction / Soldering point)	$R_{th\ J-S}$	15	$^{\circ}\text{C}/\text{W}$
Junction Temperature	T_j	125	$^{\circ}\text{C}$
Soldering Temperature	T_{sol}	Reflow Soldering : 260 $^{\circ}\text{C}$ for 10 sec. Hand Soldering : 350 $^{\circ}\text{C}$ for 3 sec.	

Note:

1. The products are sensitive to static electricity and must be carefully taken when handling products.

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Flux	Φ	115	----	145	lm	$I_f = 100\text{mA}$
Forward Voltage	V_F	8.4	----	9.4	V	$I_f = 100\text{mA}$
CRI	R_a	80	----	97		$I_f = 100\text{mA}$
Viewing Angle	2 θ 1/2	----	120	----	deg	$I_f = 100\text{mA}$
Reverse Current	I_R	----	----	10	μA	$V_r = 5\text{V}$

SMD 2835 1 W Data Sheet



Luminous Flux	Bin Code
115 – 125 lm	L11
125 – 135 lm	L12
135 – 145 lm	L13

Voltage	Bin Code
8.4 – 8.9V	V8
8.9 – 9.4V	V9

Notes:


1. Tolerance of Luminous flux: $\pm 2\%$.
2. Tolerance of Forward Voltage: $\pm 0.1V$.
3. Tolerance of Colour Rendering Index: ± 2

Bin Code	Lumens	Voltage	CCT
L11V8A1	115 – 125 lm	8.4 – 8.9V	2700 – 3000K
L11V8A2	115 – 125 lm	8.4 – 8.9V	3000 – 3300K
L11V9A1	115 – 125 lm	8.9 – 9.4V	2700 – 3000K
L11V9A2	115 – 125 lm	8.9 – 9.4V	3000 – 3300K
L12V8A1	125 – 135 lm	8.4 – 8.9V	2700 – 3000K
L12V8A2	125 – 135 lm	8.4 – 8.9V	3000 – 3300K
L12V9A1	125 – 135 lm	8.9 – 9.4V	2700 – 3000K
L12V9A2	125 – 135 lm	8.9 – 9.4V	3000 – 3300K
L12V8B1	125 – 135 lm	8.4 – 8.9V	3900 – 4200K
L12V8B2	125 – 135 lm	8.4 – 8.9V	4200 – 4500K
L12V9B1	125 – 135 lm	8.9 – 9.4V	3900 – 4200K
L12V9B2	125 – 135 lm	8.9 – 9.4V	4200 – 4500K
L12V8C1	125 – 135 lm	8.4 – 8.9V	5800 – 6200K
L12V8C2	125 – 135 lm	8.4 – 8.9V	6200 – 6600K
L12V8C3	125 – 135 lm	8.4 – 8.9V	6600 – 7000K
L12V9C1	125 – 135 lm	8.9 – 9.4V	5800 – 6200K
L12V9C2	125 – 135 lm	8.9 – 9.4V	6200 – 6600K
L12V9C3	125 – 135 lm	8.9 – 9.4V	6600 – 7000K
L13V89C1	135 – 145 lm	8.4 – 9.4V	5800 – 6200K
L13V89C2	135 – 145 lm	8.4 – 9.4V	6200 – 6600K
L13C89C3	135 – 145 lm	8.4 – 9.4V	6600 – 7000K


SMD 2835 1 W Data Sheet



Forward Voltage Shift vs Junction Temperature

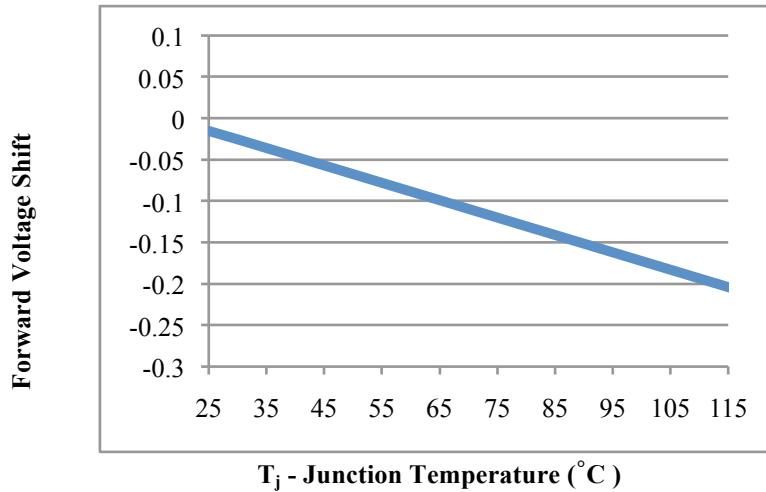


Relative Luminous Intensity vs Forward Current

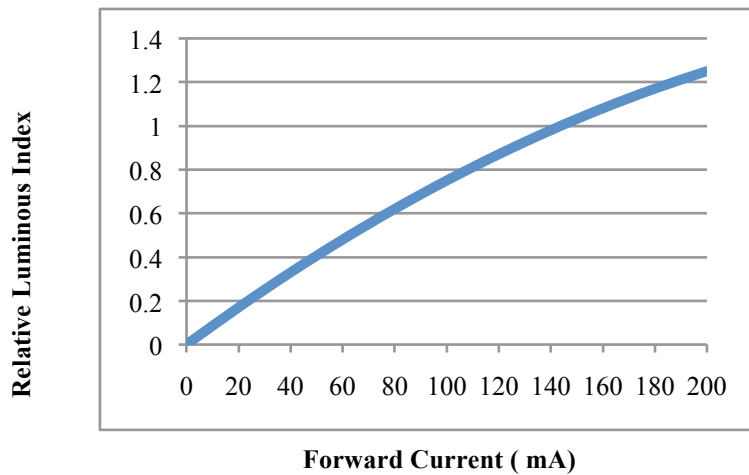


SMD 2835 1 W Data Sheet



Relative Luminous Intensity vs Junction Temperature

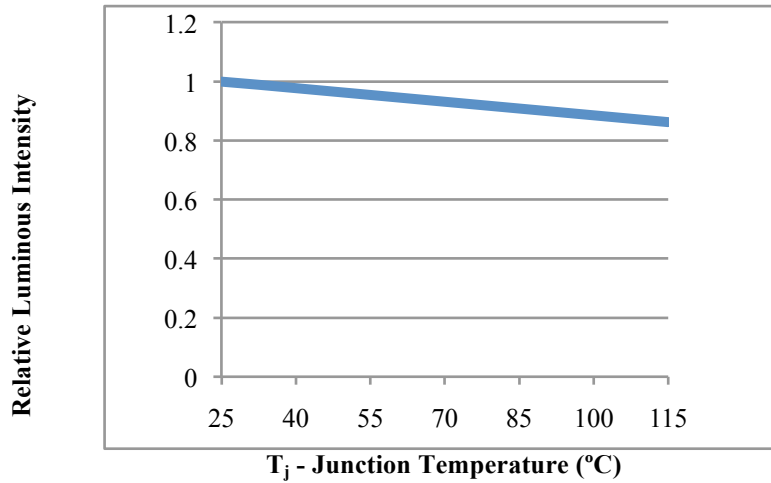

Forward Current vs. Forward Voltage

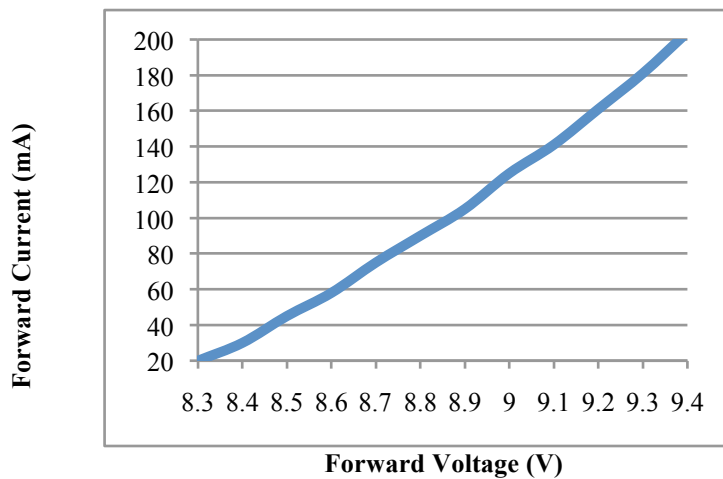


SMD 2835 1 W Data Sheet




Max Driving Forward Current vs Soldering Temperature

$R_{th\ j-S=21}$ °C/W

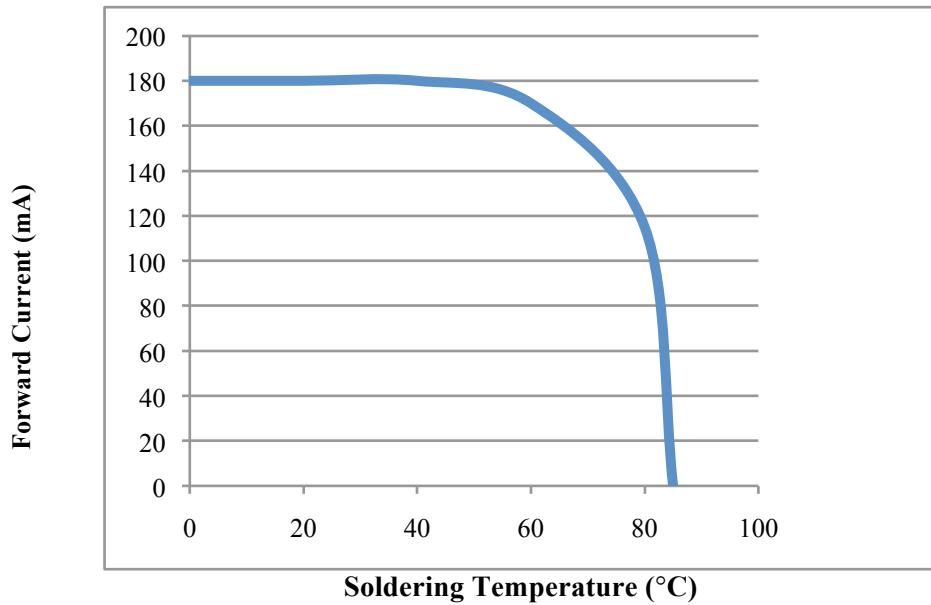


Spectrum Distribution

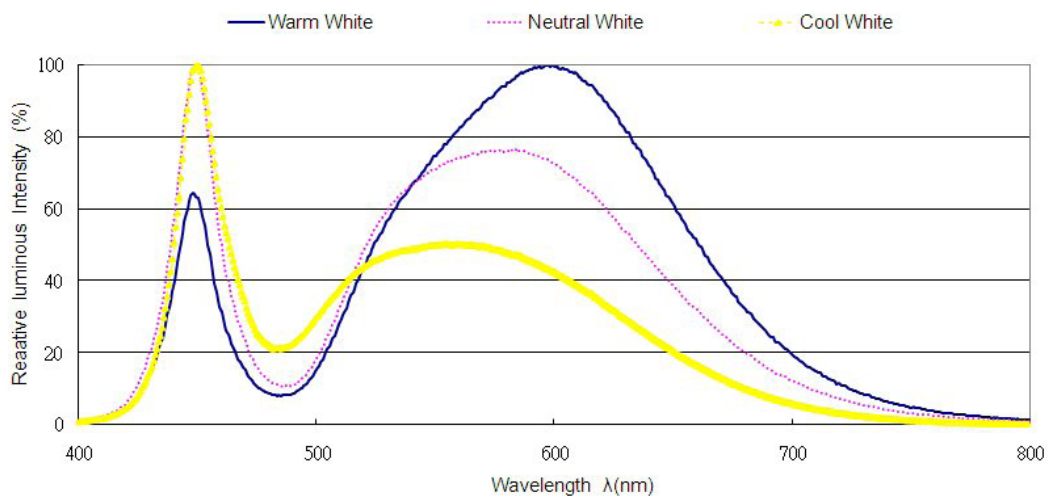

SMD 2835 1 W Data Sheet




CCT – BIN FOR WARM WHITE LIGHT

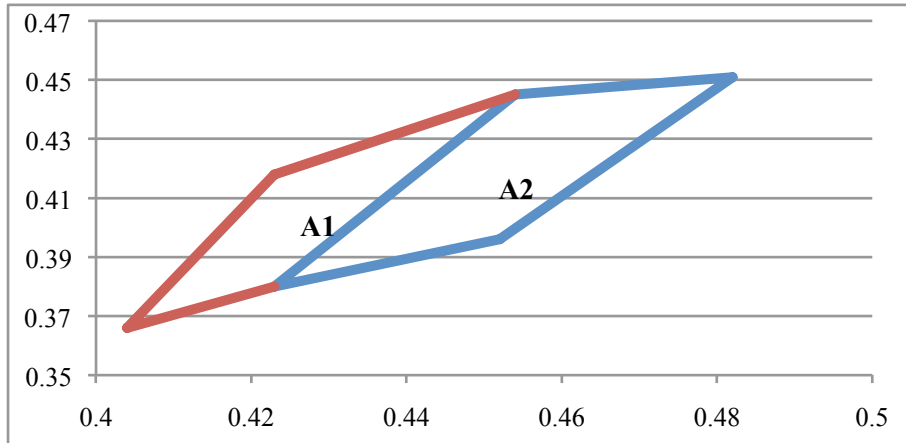

BIN A 1	2700 – 3000K
BIN A 2	3000 – 3300K

CCT – BIN FOR NATURAL WHITE

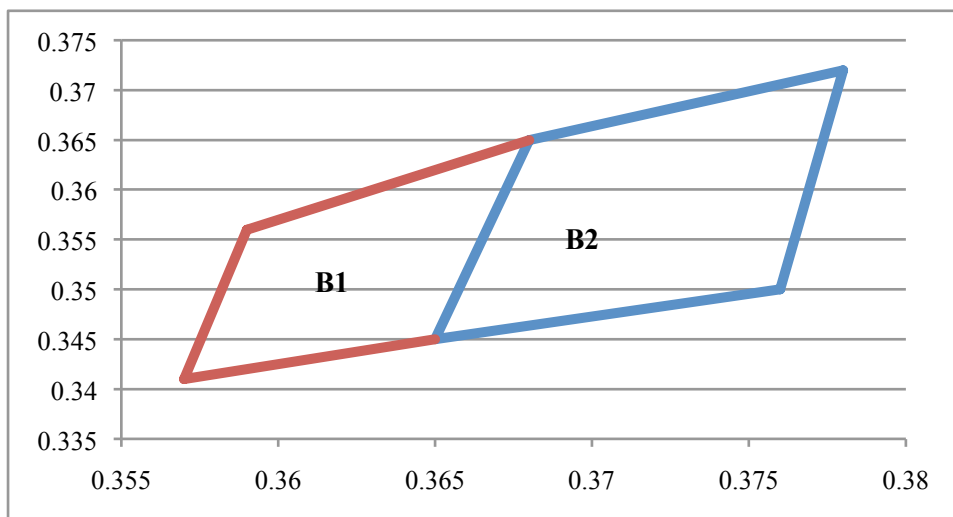


BIN B 1	3900 – 4200K
BIN B 2	4200 – 4500K

SMD 2835 1 W Data Sheet



CCT – BIN FOR COOL WHITE

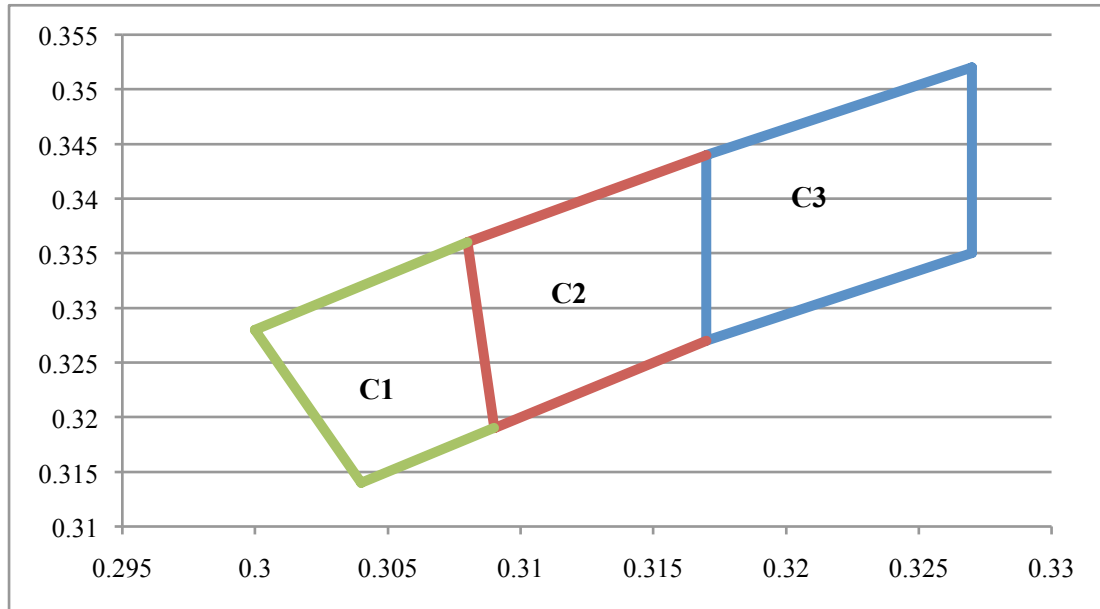


BIN C 1	5800 – 6200K
BIN C 2	6200 – 6600K
BIN C 3	6600 – 7000K

SMD 2835 1 W Data Sheet



Package Dimension

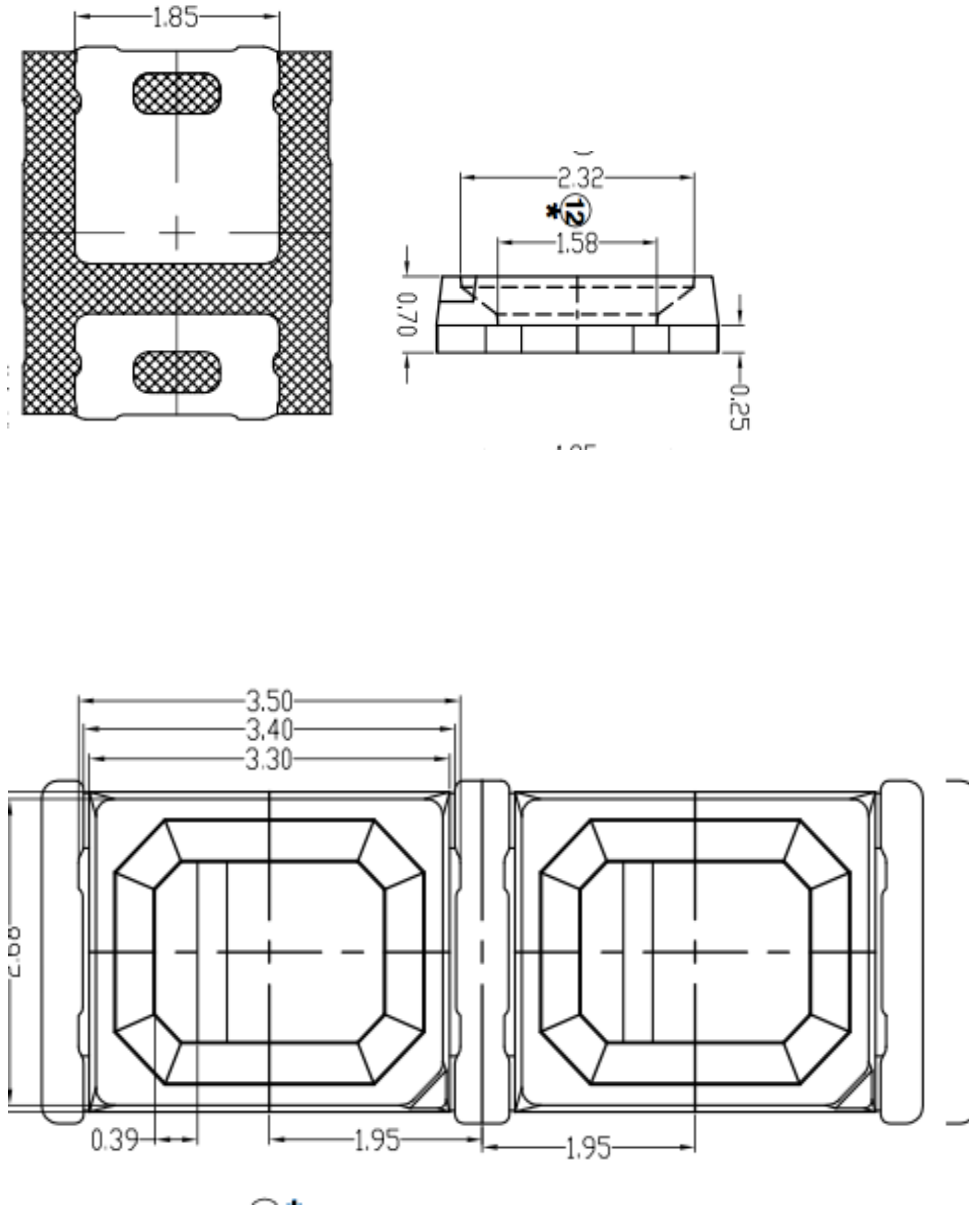


Note:

Tolerance unless mentioned is ± 0.15 mm; Unit = mm

SMD 2835 1 W Data Sheet



Reel Dimensions

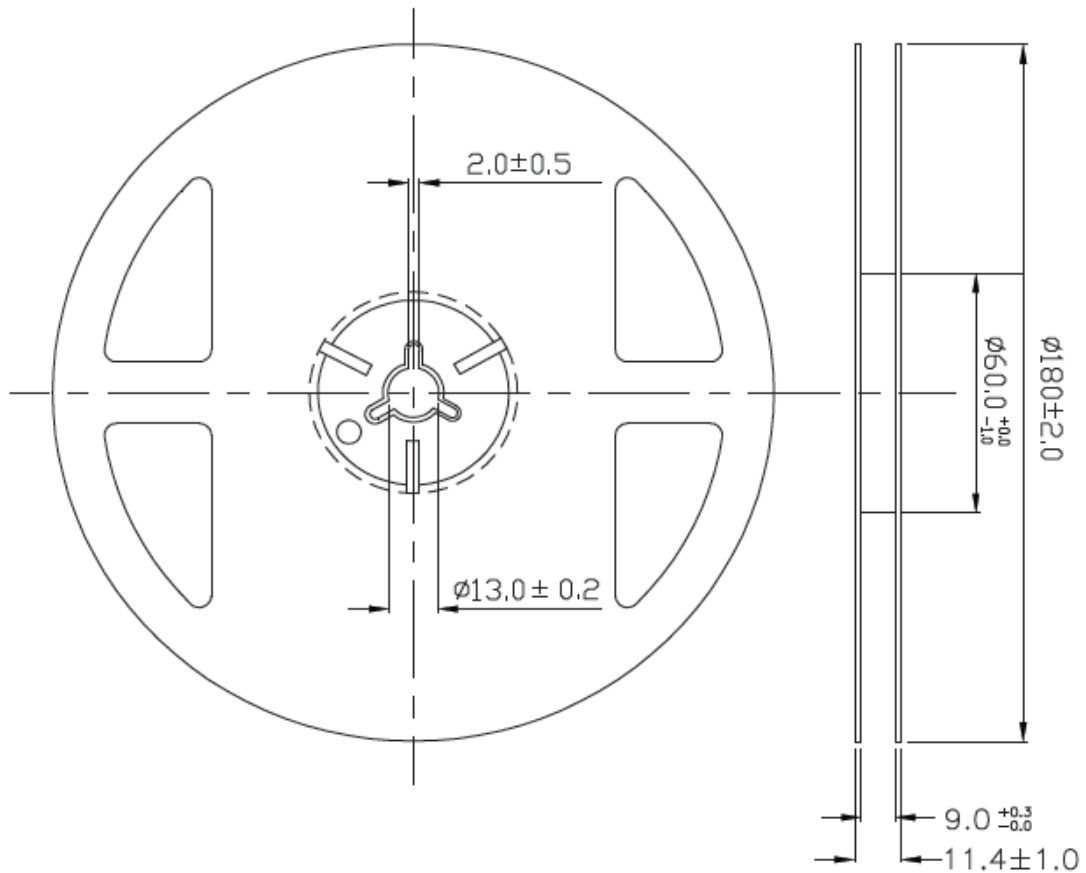


Note:

Tolerances unless mentioned ± 0.1 mm. Unit = mm

SMD 2835 1 W Data Sheet



Moisture Resistant Packing Process

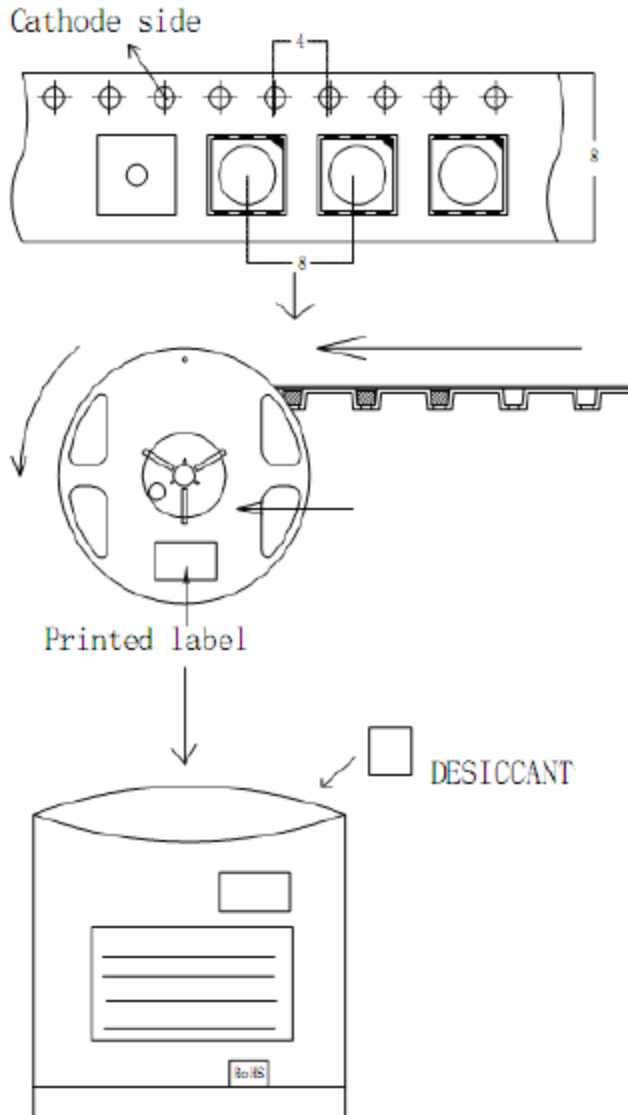

SMD 2835 1 W Data Sheet



Notes for Reflow Soldering

- Reflow soldering should not be done more than twice.
- To ensure the reliability, quality and high performance the LED's have been encapsulated with silica gel. It not recommended to put any kind of pressure on the Chip.
- Use of high precision nozzles to avoid any sort of damage to Chips is recommended
- Use of anti-static apparels while operating on LED Chips is recommended
- Ensure high quality earthing/ground wiring.

Notes for Hand Soldering

- Hand Soldering Parameters - 300°C for not more than 3 seconds
- Hand Soldering shouldn't be done more than once.
- Avoid using sharp objects for compressing LEDs
- Use of anti-static apparels while operating on LED Chips is recommended

Storage

Before opening vacuum packing

- LEDs can be stored for one year under temperature and humidity not exceeding 30°C and 60% RH.

After opening vacuum packing

- The LED's floor life is 168 Hrs under 30°C or less and 60% RH or less. Unused LEDs should be stored in moisture proof packages.